



THE SELECT  
EXPLORE


—  
BLOQ  
creative  
carpet tiles

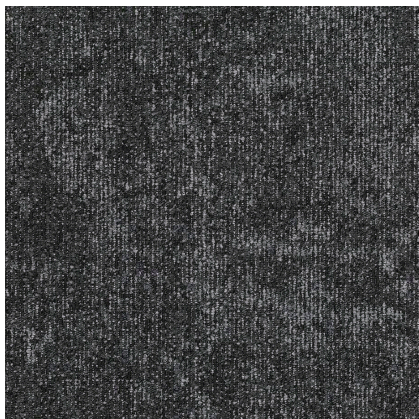


**EXPLORE 924** METAL

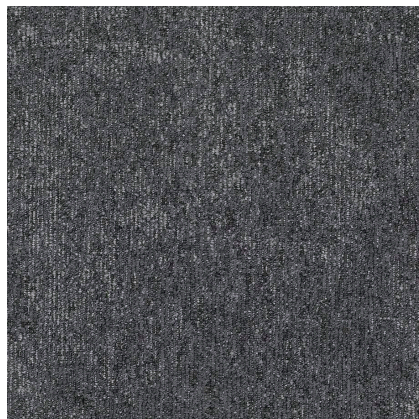


**EXPLORE 923** BASALT

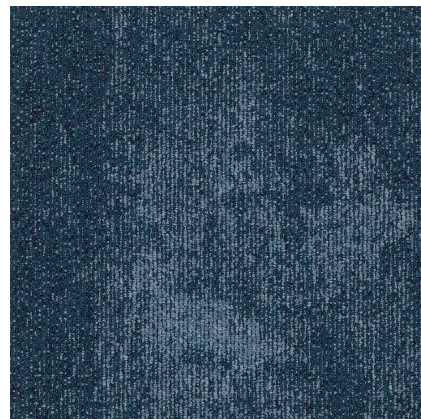


**EXPLORE 523** NAVY

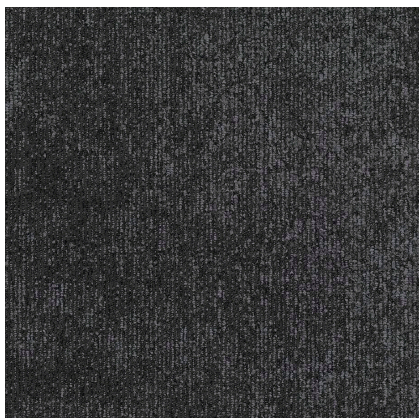

**EXPLORE 929** ONYX

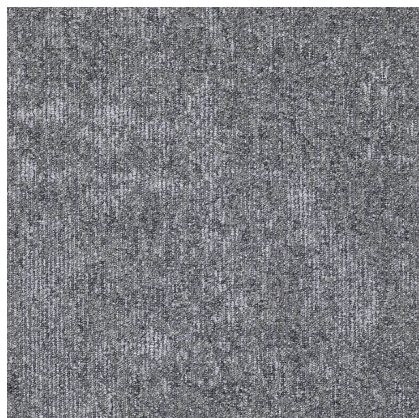

**EXPLORE 922** SILVER

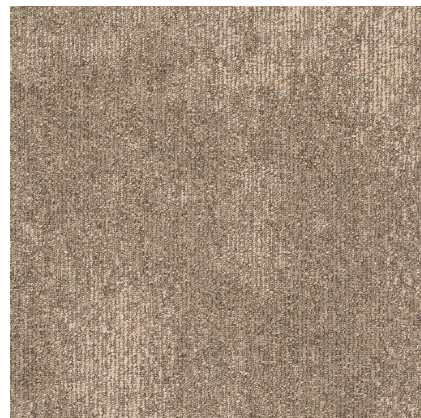

**EXPLORE 126** SAND



**EXPLORE 923** BASALT



# BLOQ

creative  
carpet tiles






THE SELECT  
EXPLORE

## SPECIFICATIONS

|                               |                                                                |
|-------------------------------|----------------------------------------------------------------|
| <b>TYPE OF MANUFACTURE</b>    | Tufted Patterned Loop Pile 1/10"                               |
| ISO 2424                      |                                                                |
| <b>PILE FIBER COMPOSITION</b> | 100% Polypropylene                                             |
| ISO 2424                      | Solution Dyed                                                  |
| <b>SECONDARY BACKING</b>      | Bitback, Modified Bitumen                                      |
| ISO 2424                      | 70% Recycled Content                                           |
| <b>DIMENSION</b>              | 50 x 50 cm                                                     |
| EN ISO 24342                  |                                                                |
| <b>PILE WEIGHT</b>            | 550 g/m <sup>2</sup>                                           |
| ISO 8543                      |                                                                |
| <b>SURFACE PILE WEIGHT</b>    | 369 g/m <sup>2</sup>                                           |
| ISO 8543                      |                                                                |
| <b>TOTAL WEIGHT</b>           | 4 200 g/m <sup>2</sup>                                         |
| ISO 8543                      |                                                                |
| <b>TOTAL THICKNESS</b>        | 6.5 mm                                                         |
| ISO 1765                      |                                                                |
| <b>PILE HEIGHT</b>            | 3.4 mm                                                         |
| ISO 1766                      |                                                                |
| <b>PILE DENSITY</b>           | 0.109 g/m <sup>3</sup>                                         |
| ISO 8543                      |                                                                |
| <b>NUMBER OF TUFTS</b>        | 160 000 /m <sup>2</sup>                                        |
| ISO 1763                      |                                                                |
| <b>DIMENSIONAL STABILITY</b>  | ≤ 0.2%                                                         |
| ISO 2551                      |                                                                |
| <b>NUMBER OF COLOURS</b>      | 6                                                              |
| <b>PACKAGING</b>              | Box: 20 tiles / 5 m <sup>2</sup><br>Pallet: 200 m <sup>2</sup> |

## PERFORMANCE

|                                 |                                              |
|---------------------------------|----------------------------------------------|
| <b>CLASSIFICATION</b>           | 31                                           |
| EN 1307                         |                                              |
| <b>LUXURY RATING</b>            | LC1                                          |
| EN 1307                         |                                              |
| <b>CASTOR CHAIR RATING</b>      | B: Occasional use                            |
| EN 985                          |                                              |
| <b>FIRE CLASSIFICATION</b>      | C <sub>fl</sub> -s1                          |
| EN 13501-1                      |                                              |
| <b>IMPACT SOUND INSULATION</b>  | ΔL <sub>w</sub> : 24 dB                      |
| EN ISO 10140-3                  |                                              |
| <b>SOUND ABSORPTION</b>         | Frequency Hz 125 250 500 1000 2000 4000      |
| EN ISO 354                      | α <sub>s</sub> 0.01 0.02 0.06 0.15 0.35 0.38 |
| <b>NOISE REDUCTION</b>          | α <sub>w</sub> : 0.15                        |
| EN ISO 354                      |                                              |
| <b>PERMANENT ANTISTATIC</b>     | ≤ 2 kV                                       |
| ISO 6356                        |                                              |
| <b>THERMAL RESISTANCE</b>       | 0.080 m <sup>2</sup> K/W                     |
| ISO 8302                        |                                              |
| <b>COLOUR FASTNESS TO LIGHT</b> | ≥ 5-6                                        |
| EN ISO 105-B02                  |                                              |
| <b>COLOUR FASTNESS TO WATER</b> | ≥ 4-5                                        |
| EN ISO 105-E01                  |                                              |
| <b>RUBBING FASTNESS</b>         | ≥ 4                                          |
| EN ISO 105-X12                  |                                              |
| <b>GUT N° PRODIS</b>            | EEEEAFEE0                                    |

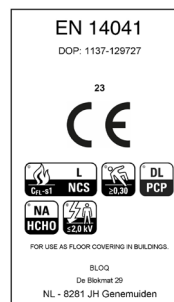

22/06/2023

All rights reserved to alter technical specifications.



THE SELECT  
ACHIEVE


—  
BLOQ  
creative  
carpet tiles




**ACHIEVE 924 METAL**




**ACHIEVE 923 BASALT**

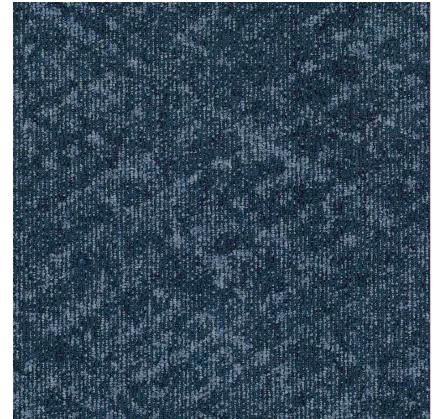

**ACHIEVE 523 NAVY**

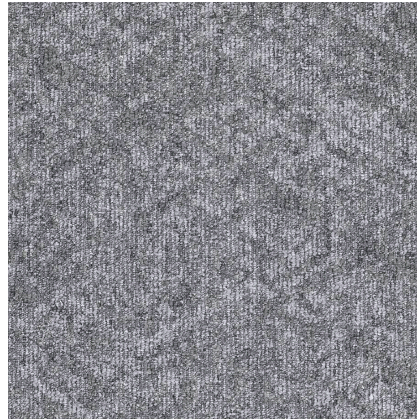


**ACHIEVE 922 SILVER**

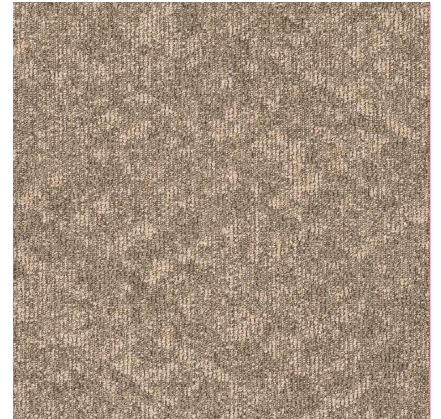

**ACHIEVE 126 SAND**



**ACHIEVE 929 ONYX**

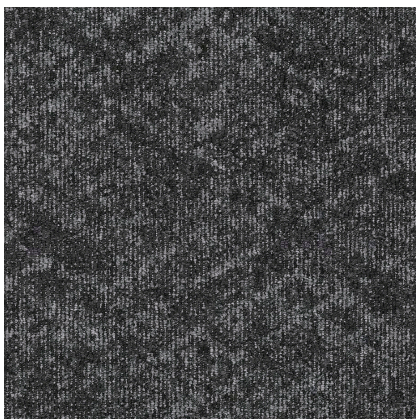

**ACHIEVE 924 METAL**




**ACHIEVE 922 SILVER**



# BLOQ

creative  
carpet tiles

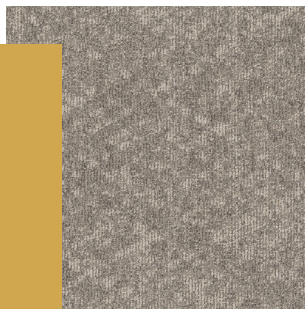




## THE SELECT ACHIEVE

### SPECIFICATIONS

|                               |                                                                |
|-------------------------------|----------------------------------------------------------------|
| <b>TYPE OF MANUFACTURE</b>    | Tufted Patterned Loop Pile 1/10"                               |
| ISO 2424                      |                                                                |
| <b>PILE FIBER COMPOSITION</b> | 100% Polypropylene                                             |
| ISO 2424                      | Solution Dyed                                                  |
| <b>SECONDARY BACKING</b>      | Bitback, Modified Bitumen                                      |
| ISO 2424                      | 70% Recycled Content                                           |
| <b>DIMENSION</b>              | 50 x 50 cm                                                     |
| EN ISO 24342                  |                                                                |
| <b>PILE WEIGHT</b>            | 550 g/m <sup>2</sup>                                           |
| ISO 8543                      |                                                                |
| <b>SURFACE PILE WEIGHT</b>    | 369 g/m <sup>2</sup>                                           |
| ISO 8543                      |                                                                |
| <b>TOTAL WEIGHT</b>           | 4 200 g/m <sup>2</sup>                                         |
| ISO 8543                      |                                                                |
| <b>TOTAL THICKNESS</b>        | 6.5 mm                                                         |
| ISO 1765                      |                                                                |
| <b>PILE HEIGHT</b>            | 3.4 mm                                                         |
| ISO 1766                      |                                                                |
| <b>PILE DENSITY</b>           | 0.109 g/m <sup>3</sup>                                         |
| ISO 8543                      |                                                                |
| <b>NUMBER OF TUFTS</b>        | 160 000 /m <sup>2</sup>                                        |
| ISO 1763                      |                                                                |
| <b>DIMENSIONAL STABILITY</b>  | ≤ 0.2%                                                         |
| ISO 2551                      |                                                                |
| <b>NUMBER OF COLOURS</b>      | 6                                                              |
| <b>PACKAGING</b>              | Box: 20 tiles / 5 m <sup>2</sup><br>Pallet: 200 m <sup>2</sup> |

### PERFORMANCE

|                                 |                                              |
|---------------------------------|----------------------------------------------|
| <b>CLASSIFICATION</b>           | 31                                           |
| EN 1307                         |                                              |
| <b>LUXURY RATING</b>            | LC1                                          |
| EN 1307                         |                                              |
| <b>CASTOR CHAIR RATING</b>      | B: Occasional use                            |
| EN 985                          |                                              |
| <b>FIRE CLASSIFICATION</b>      | C <sub>fl</sub> -s1                          |
| EN 13501-1                      |                                              |
| <b>IMPACT SOUND INSULATION</b>  | ΔL <sub>w</sub> : 24 dB                      |
| EN ISO 10140-3                  |                                              |
| <b>SOUND ABSORPTION</b>         | Frequency Hz 125 250 500 1000 2000 4000      |
| EN ISO 354                      | α <sub>s</sub> 0.01 0.02 0.06 0.15 0.35 0.38 |
| <b>NOISE REDUCTION</b>          | α <sub>w</sub> : 0.15                        |
| EN ISO 354                      |                                              |
| <b>PERMANENT ANTISTATIC</b>     | ≤ 2 kV                                       |
| ISO 6356                        |                                              |
| <b>THERMAL RESISTANCE</b>       | 0.080 m <sup>2</sup> K/W                     |
| ISO 8302                        |                                              |
| <b>COLOUR FASTNESS TO LIGHT</b> | ≥ 5-6                                        |
| EN ISO 105-B02                  |                                              |
| <b>COLOUR FASTNESS TO WATER</b> | ≥ 4-5                                        |
| EN ISO 105-E01                  |                                              |
| <b>RUBBING FASTNESS</b>         | ≥ 4                                          |
| EN ISO 105-X12                  |                                              |
| <b>GUT N° PRODIS</b>            | EEEEAFEE0                                    |

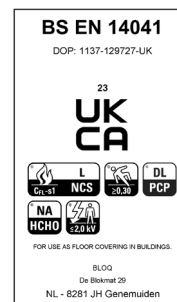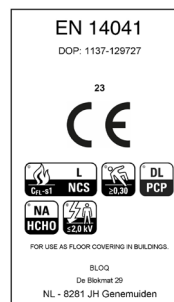


22/06/2023

All rights reserved to alter technical specifications.



# THE SELECT REALISE


BLOQ  
creative  
carpet tiles

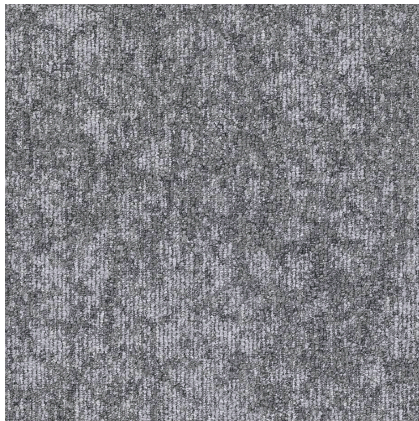


**REALISE 922 SILVER**




**REALISE 126 SAND**

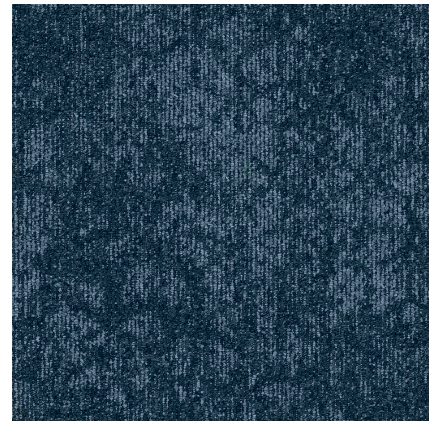


**REALISE 523 NAVY**

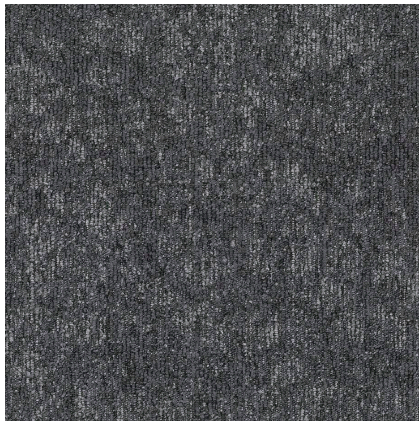

**REALISE 923 BASALT**

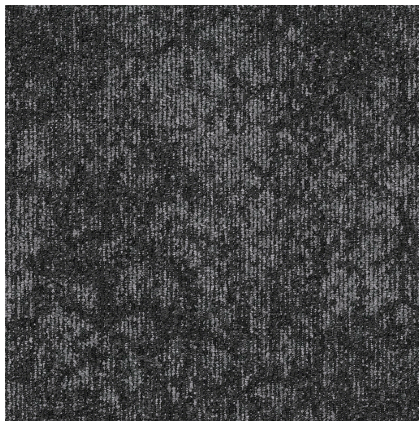

**REALISE 924 METAL**

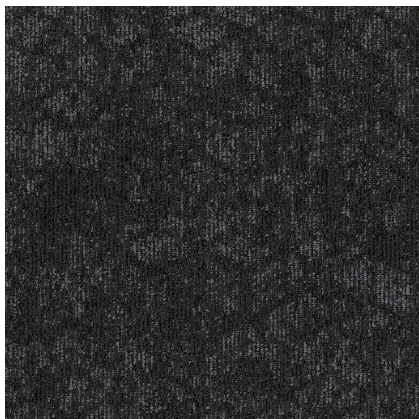

**REALISE 929 ONYX**



**REALISE 523 NAVY**



# BLOQ

creative  
carpet tiles





## THE SELECT REALISE

### SPECIFICATIONS

|                               |                                                                |
|-------------------------------|----------------------------------------------------------------|
| <b>TYPE OF MANUFACTURE</b>    | Tufted Patterned Loop Pile 1/10"                               |
| ISO 2424                      |                                                                |
| <b>PILE FIBER COMPOSITION</b> | 100% Polypropylene                                             |
| ISO 2424                      | Solution Dyed                                                  |
| <b>SECONDARY BACKING</b>      | Bitback, Modified Bitumen                                      |
| ISO 2424                      | 70% Recycled Content                                           |
| <b>DIMENSION</b>              | 50 x 50 cm                                                     |
| EN ISO 24342                  |                                                                |
| <b>PILE WEIGHT</b>            | 550 g/m <sup>2</sup>                                           |
| ISO 8543                      |                                                                |
| <b>SURFACE PILE WEIGHT</b>    | 369 g/m <sup>2</sup>                                           |
| ISO 8543                      |                                                                |
| <b>TOTAL WEIGHT</b>           | 4 200 g/m <sup>2</sup>                                         |
| ISO 8543                      |                                                                |
| <b>TOTAL THICKNESS</b>        | 6.5 mm                                                         |
| ISO 1765                      |                                                                |
| <b>PILE HEIGHT</b>            | 3.4 mm                                                         |
| ISO 1766                      |                                                                |
| <b>PILE DENSITY</b>           | 0.109 g/m <sup>3</sup>                                         |
| ISO 8543                      |                                                                |
| <b>NUMBER OF TUFTS</b>        | 160 000 /m <sup>2</sup>                                        |
| ISO 1763                      |                                                                |
| <b>DIMENSIONAL STABILITY</b>  | ≤ 0.2%                                                         |
| ISO 2551                      |                                                                |
| <b>NUMBER OF COLOURS</b>      | 6                                                              |
| <b>PACKAGING</b>              | Box: 20 tiles / 5 m <sup>2</sup><br>Pallet: 200 m <sup>2</sup> |

### PERFORMANCE

|                                 |                                              |
|---------------------------------|----------------------------------------------|
| <b>CLASSIFICATION</b>           | 31                                           |
| EN 1307                         |                                              |
| <b>LUXURY RATING</b>            | LC1                                          |
| EN 1307                         |                                              |
| <b>CASTOR CHAIR RATING</b>      | B: Occasional use                            |
| EN 985                          |                                              |
| <b>FIRE CLASSIFICATION</b>      | C <sub>fl</sub> -s1                          |
| EN 13501-1                      |                                              |
| <b>IMPACT SOUND INSULATION</b>  | ΔL <sub>w</sub> : 24 dB                      |
| EN ISO 10140-3                  |                                              |
| <b>SOUND ABSORPTION</b>         | Frequency Hz 125 250 500 1000 2000 4000      |
| EN ISO 354                      | α <sub>s</sub> 0.01 0.02 0.06 0.15 0.35 0.38 |
| <b>NOISE REDUCTION</b>          | α <sub>w</sub> : 0.15                        |
| EN ISO 354                      |                                              |
| <b>PERMANENT ANTISTATIC</b>     | ≤ 2 kV                                       |
| ISO 6356                        |                                              |
| <b>THERMAL RESISTANCE</b>       | 0.080 m <sup>2</sup> K/W                     |
| ISO 8302                        |                                              |
| <b>COLOUR FASTNESS TO LIGHT</b> | ≥ 5-6                                        |
| EN ISO 105-B02                  |                                              |
| <b>COLOUR FASTNESS TO WATER</b> | ≥ 4-5                                        |
| EN ISO 105-E01                  |                                              |
| <b>RUBBING FASTNESS</b>         | ≥ 4                                          |
| EN ISO 105-X12                  |                                              |
| <b>GUT N° PRODIS</b>            | EEEEFFEO                                     |

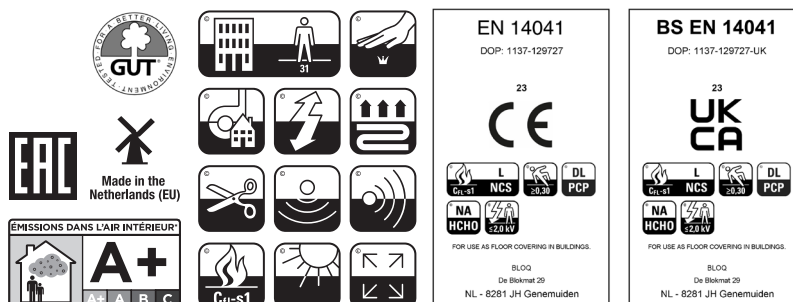

All rights reserved to alter technical specifications.



# THE SELECT ENTRY

—  
**BLOQ**  
creative  
carpet tiles



**ENTRY 913** SILVER




**ENTRY 511** SKY



**ENTRY 512** NAVY



**ENTRY 914** FOG

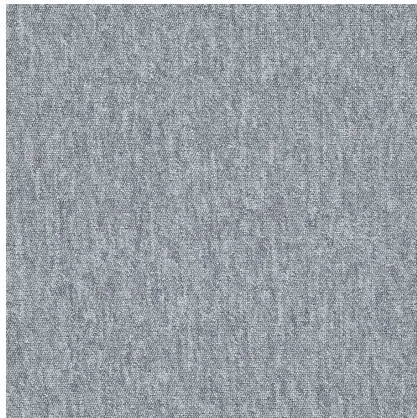

**ENTRY 913** SILVER




**ENTRY 112** SAND



**ENTRY 916** BASALT



**ENTRY 917** ONYX

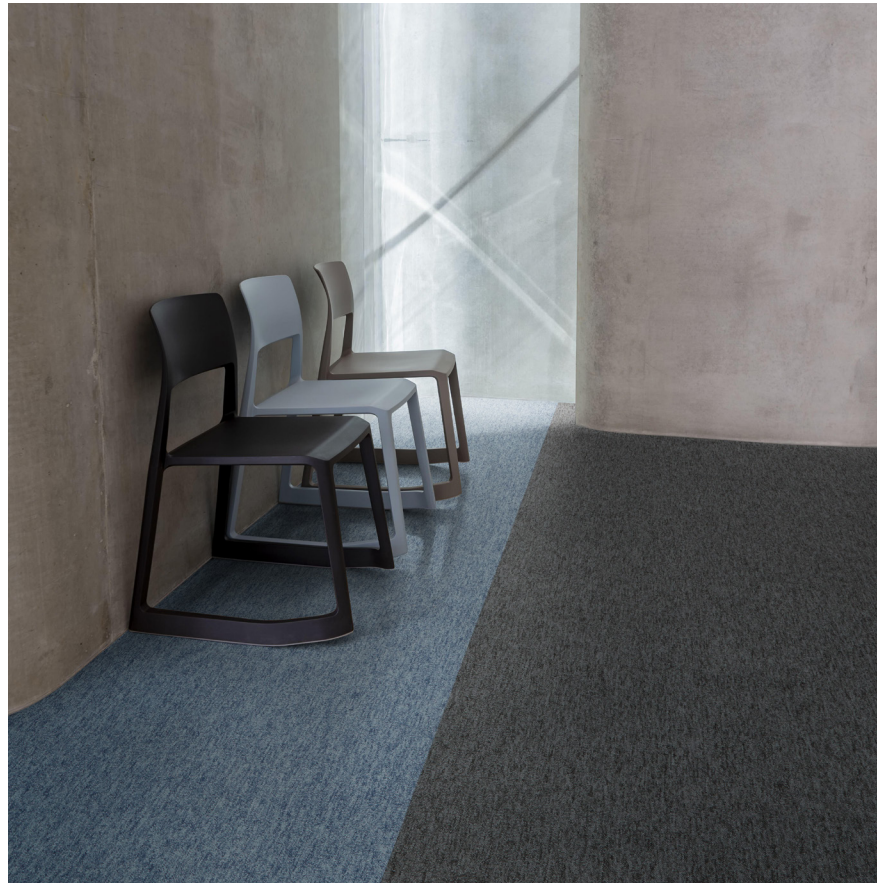

**ENTRY 511** SKY & **914** FOG



# BLOQ

creative  
carpet tiles


THE SELECT  
ENTRY

## SPECIFICATIONS

|                               |                                  |
|-------------------------------|----------------------------------|
| <b>TYPE OF MANUFACTURE</b>    | Tufted Loop Pile 1/10"           |
| ISO 2424                      |                                  |
| <b>PILE FIBER COMPOSITION</b> | 100% Polypropylene               |
| ISO 2424                      | Solution Dyed                    |
| <b>SECONDARY BACKING</b>      | Bitback, Modified Bitumen        |
| ISO 2424                      | 70% Recycled Content             |
| <b>DIMENSION</b>              | 50 x 50 cm                       |
| EN ISO 24342                  |                                  |
| <b>PILE WEIGHT</b>            | 450 g/m <sup>2</sup>             |
| ISO 8543                      |                                  |
| <b>SURFACE PILE WEIGHT</b>    | 285 g/m <sup>2</sup>             |
| ISO 8543                      |                                  |
| <b>TOTAL WEIGHT</b>           | 4 100 g/m <sup>2</sup>           |
| ISO 8543                      |                                  |
| <b>TOTAL THICKNESS</b>        | 5.6 mm                           |
| ISO 1765                      |                                  |
| <b>PILE HEIGHT</b>            | 2.5 mm                           |
| ISO 1766                      |                                  |
| <b>PILE DENSITY</b>           | 0.115 g/m <sup>3</sup>           |
| ISO 8543                      |                                  |
| <b>NUMBER OF TUFTS</b>        | 151 000 /m <sup>2</sup>          |
| ISO 1763                      |                                  |
| <b>DIMENSIONAL STABILITY</b>  | ≤ 0.2%                           |
| ISO 2551                      |                                  |
| <b>NUMBER OF COLOURS</b>      | 7                                |
| <b>PACKAGING</b>              | Box: 20 tiles / 5 m <sup>2</sup> |
|                               | Pallet: 200 m <sup>2</sup>       |

## PERFORMANCE

|                                 |                                              |
|---------------------------------|----------------------------------------------|
| <b>CLASSIFICATION</b>           | 31                                           |
| EN 1307                         |                                              |
| <b>LUXURY RATING</b>            | LC1                                          |
| EN 1307                         |                                              |
| <b>CASTOR CHAIR RATING</b>      | B: Occasional use                            |
| EN 985                          |                                              |
| <b>FIRE CLASSIFICATION</b>      | C <sub>fl</sub> -s1                          |
| EN 13501-1                      |                                              |
| <b>IMPACT SOUND INSULATION</b>  | ΔL <sub>w</sub> : 23 dB                      |
| EN ISO 10140-3                  |                                              |
| <b>SOUND ABSORPTION</b>         | Frequency Hz 125 250 500 1000 2000 4000      |
| EN ISO 354                      | α <sub>s</sub> 0.01 0.01 0.04 0.11 0.28 0.30 |
| <b>NOISE REDUCTION</b>          | α <sub>w</sub> : 0.10                        |
| EN ISO 354                      |                                              |
| <b>PERMANENT ANTISTATIC</b>     | ≤ 2 kV                                       |
| ISO 6356                        |                                              |
| <b>THERMAL RESISTANCE</b>       | 0.057 m <sup>2</sup> K/W                     |
| ISO 8302                        |                                              |
| <b>COLOUR FASTNESS TO LIGHT</b> | ≥ 5-6                                        |
| EN ISO 105-B02                  |                                              |
| <b>COLOUR FASTNESS TO WATER</b> | ≥ 4-5                                        |
| EN ISO 105-E01                  |                                              |
| <b>RUBBING FASTNESS</b>         | ≥ 4                                          |
| EN ISO 105-X12                  |                                              |
| <b>GUT N° PRODIS</b>            | 05F76903                                     |



All rights reserved to alter technical specifications.