


Pescara Tiles

Tuft gauge	1/10 loop pile	ISO 2424
Pilecomposition	100% PA SDN	ISO 2424
Primary Backing	Non Woven	ISO 2424
Secondary backing	Bitumen	ISO 2424
Width	50 x 50 cm	± 0.2% EN 984
Pile Weight	550 gr/m ²	ISO 8543
Total weight	Bitumen : 4000 gr/m ²	± 15% ISO 8543
Pile height	2 mm	± 2 mm ISO 1766
Total Height	Bitumen : 5 mm	ISO 1765
Number of knots	181.240/m ²	-7.5% .+10% ISO 1763
Fire Classification	Bfl-S1	EN 13501-1
Use Area	Heavy project use (33)	EN 1307
GUT Nr.	00EBE12F GUT	www.pro-dis.info
Light fastness	≥ 5	105-B02
Wearebility	≥ 4	105-X12
Water fastness	≥ 4	105-E01
Electrostatic charging	<2 kV	ISO 6356
Luxury class	LC1	EN 1307
Comments	Installation designs; Monolithic, Quarter turn, Brick, Ashlar, Random.	
Pictures	www.condorcontract.com	

Floorsymbols




Certificates

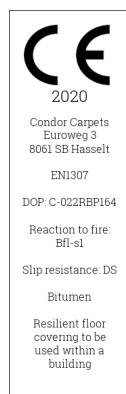




Contract Pescara

Choose your style

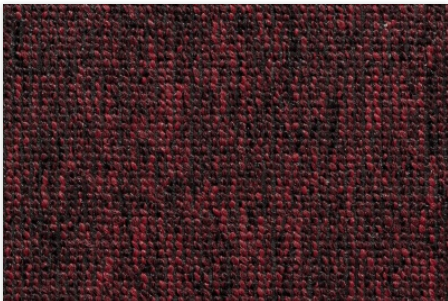

20

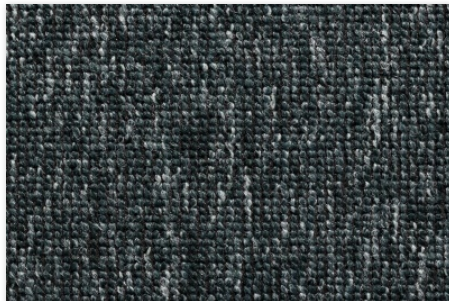

41



72



75



78



83



120



175



178




183



278



291

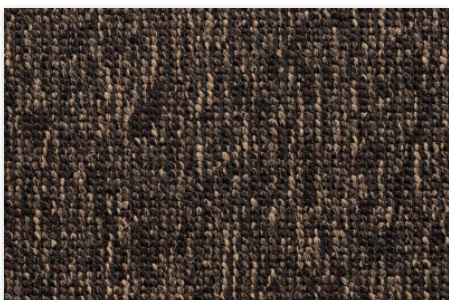

293




377




378



393

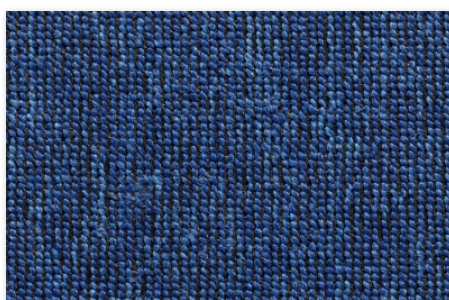

482

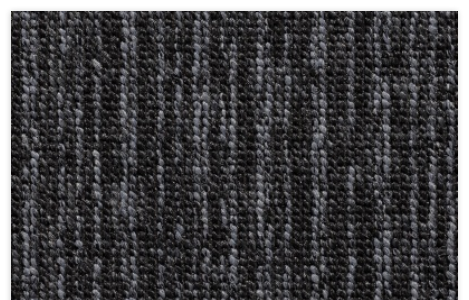

576